





TFX POWER 3

300W

IDEAL APPLICATIONS

Mini and media PC systems Systems with low installation depth Classic office and web applications

HIGHLIGHTS

80 PLUS® Gold / Bronze efficiency (up to 91.7 / 88.3%) Up to two strong dual 12V-rails Compact and space-saving design Sleeved or flat black cables for convenient usage

Compact And Silent Energy


TFX Power 3 300W: the upgraded be quiet! high-efficiency PSU for mini and media PCs with great features at a reasonable price.

Highlights »

- Certified 80 PLUS Gold and Bronze efficiency (up to 91.7%)
- High stability and PCIe graphics card support
- 300W of continuous power
- High-quality temperature-controlled 80mm fan for low-noise operation
- Sleeved or flat black cables up to 60cm long
- Meets the latest safety and efficiency requirements
- Standby draw less than 0.17 watts
- Three-year manufacturer's warranty
- Product conception, design and quality control in Germany







-/1

3

2

1

TFX POWER 3

Techn	ical Data »			
	Model	300W Gold	300W Bronze	
	Article no.	BN323	BN322	
	EAN Code	4260052188293	4260052188286	
	Voltage (Vac) / Frequency (Hz)	100 - 240 / 50 - 60	100 - 240 / 50 - 60	
	Dimensions (L x W x H)	175 x 85 x 65	175 x 85 x 65	
	TFX 12V 2.52 / EPS 12V 2.92	·/·	V/V	
	Wire-free (DC-side)	-	-	
_	Silence-optimized be quiet! fan (mm)	80	80	
IN GENERAL	Noise level (dB(A)) at 20 / 50 / 100% load	9.7 / 12.4 / 21.7	14.6 / 15.4 / 29.1	
GEN	12V rail (Multi-Rail) / 12V Single Rail	2 / -	-/ -	
Z	Overclocking Key / Jumper	-/-	-/-	
	Power Good signal	100-150ms	100-150ms	
	PFC	active	active	
	Certification / Efficiency (%) at 230V	80 PLUS [®] Gold / 91.7%	80 PLUS® Bronze / 88.3%	
	Energy Star 7.0 compatible	•	•	
	ErP ready / Power in stand-by (W)	√ / <0.17	√ / <0.14	
	OCP, OVP, UVP, SCP, OPP, OTP	•	·	
	Lifetime of PSU at 25°C (h)	100,000	100,000	
	No. of cables	5	5	
	Maximum cable length (cm)	60	60	
CABLES	Length of ATX-connection cable (cm)	35	35	
	Cable management	Fixed	Fixed	
	Sleeved cables	20+4 pin	20+4 pin	
	Flat cables	PCIe, drives, P4	PCle, drives, P4	
	ATX motherboard (20+4-pin)	~	~	

-/1

3

2

1

AC Input 100-240Vac 50-60Hz DC Output 3.3V 5V 12V1 12V2 -12V 5VsB 13A 13A Max. Current 18A 18A 0.3A 3A 24A 300W Gold Max. Combined 103W 288W Power 300W

AC Input			100-24	40Vac 50-60Hz	5-2A	
DC Output		3.3V	5V	12V1	-12V	5VsB
	Max. Current	16A	16A	25A	0.3A	2.5A
300W Bronze				25A		
300W Bronze	Max. Combined	85	5W	300W	3.6W	12.5W
	Power	300W				

PCI express (6+2-pin)

P8-/P4-connector

SATA

PATA

Output Data »


FDD (Floppy)

CONNECTORS


b∈ qui∈t!°

TFX POWER 3

COMPACT AND SILENT ENERGY

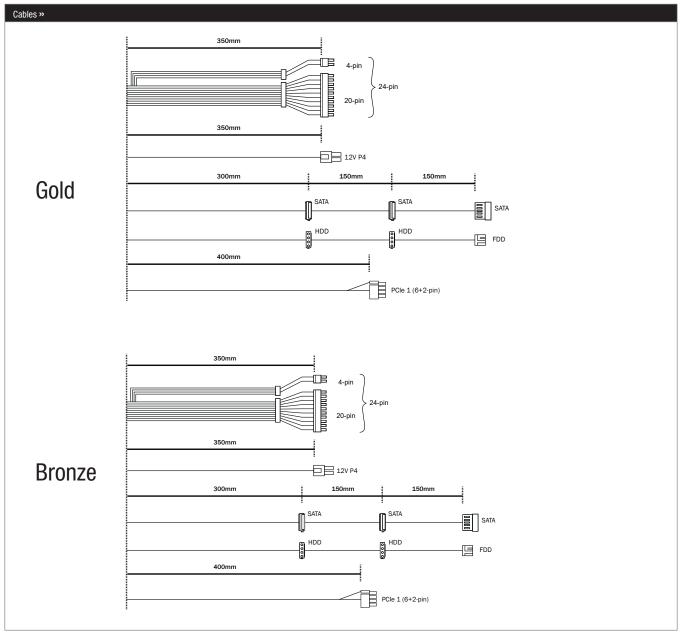

Logistics data »					
Region	Model	Article no	EAN code		
EU	TFX Power 3 300W Gold	BN323	4260052188293		
FU	TEX Power 3 300W Bronze	BN322	4260052188286		





Contact »	
be quiet! Headquarters	Service hotline: +49 40 7367 686 44
Listan GmbH	e-mail: service@bequiet.com
Wilhelm-Bergner-Straße 11c 21509 Glinde Germany	Visit the contact section on bequiet.com for the right regional service information.