Delock Adapter HDMI-A male > Displayport 1.2 female black

Description

This adapter by Delock enables you to connect e.g. a Displayport monitor through a free HDMI interface.

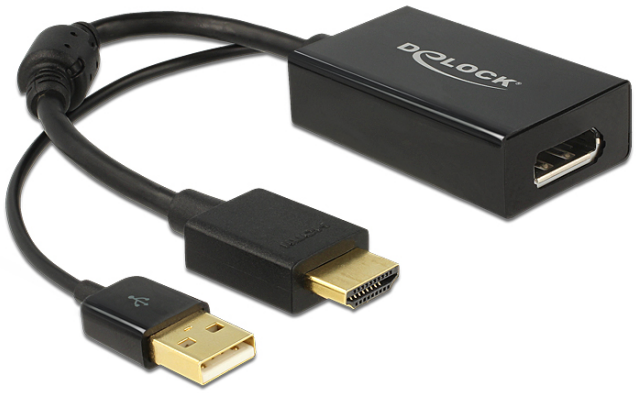

Specification

- Connector:
  Input:
  1 x High Speed HDMI-A 19 pin male
  1 x USB type A male (power supply)
  Output:
  1 x Displayport 20 pin female
- Chipset: STDP2600
- Displayport 1.2 and High Speed HDMI specification
- High Speed HDMI receiver - link rate up to 2.97 Gb/s per data pair
- Supports 3D displays
- Supports a resolution up to 4Kx2K @ 30 Hz; 1920 x 1080 @ 120 Hz (depending on the system and the connected hardware)
- Supports Audio 7.1 channel up to 192 kHz sample rate
- Supports HDCP 1.3
- Gold-plated connector
- Colour depth:
  RGB / YCC (4:4:4) - 16 bit colour
  YCC (4:2:2 / 4:2:0) - 16 bit colour
- Power consumption:
  operation: ca. 500 mW
  standby: ca. 25 mW
- Colour: black
- Cable length: ca. 24.5 cm (incl. connector)
- OS independent, no driver installation necessary

System requirements

- A free HDMI-A female port
- A free USB-A female port
- Monitor with a free Displayport interface
- One Displayport cable

Package content

- Adapter HDMI to Displayport
- User manual

Item No. 62667

EAN: 4043619626670

Country of origin: China

Package: Retail Box

© 2016 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.

Images

© 2016 by Delock. All names and symbols mentioned here are property of the respective producer. Printing errors, changes and errors excepted.