


## Delock Cable mini DisplayPort 1.1 male > DVI 24+1 male 2 m

### Description

This cable by Delock can be used to connect a display with an DVI port to a PC or a laptop with mini DisplayPort interface.

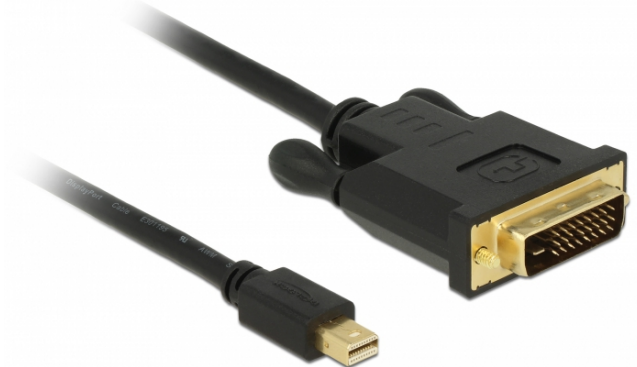

ca. 2 m

### Specification

- Connectors:
  - 1 x mini DisplayPort 20 pin male >
  - 1 x DVI 24+1 male with screws
- Chipset: NXP PTN3361
- DVI-D (Single Link), VGA not wired
- DisplayPort 1.1a specification
- Passive cable (level shifter), suitable only for graphics cards with DP++ output
- Signal direction: mini DisplayPort input > DVI output
- Cable gauge: 32 AWG
- Cable diameter: ca. 5.5 mm
- Twisted-pair cabling
- Copper conductor
- Gold-plated connectors
- Triple shielded cable
- Data transfer rate up to 3.96 Gb/s
- Resolution up to 1920 x 1200 @ 60 Hz (depending on the system and the connected hardware)
- Colour: black
- Length incl. connectors: ca. 2 m

### System requirements

- One free mini Displayport DP++ female

### Package content

- Mini Displayport to DVI cable

### Item no. 83989

EAN: 4043619839896

Country of origin: China

Package: Poly bag



### Images



General	
Specification:	DisplayPort 1.1
Interface	
connector:	1 x mini DisplayPort 20 pin male 1 x DVI 24+1 male with screws
Technical characteristics	
Data transfer rate:	3.96 Gb/s
Maximum screen resolution:	1920 x 1200 @ 60 Hz
Physical characteristics	
Cable colour:	black
Cable diameter:	5.5 mm
Cable length incl. connector:	2 m
Connector finishing:	gold-plated
Pin finishing:	gold-plated
Conductor material:	copper
Conductor gauge:	32 AWG
Shielding:	triple