


# Delock PCI Express x1 Card to 2 x external SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female

## Description

This PCI Express card by Delock expands the PC by **two external USB-C™ ports**. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

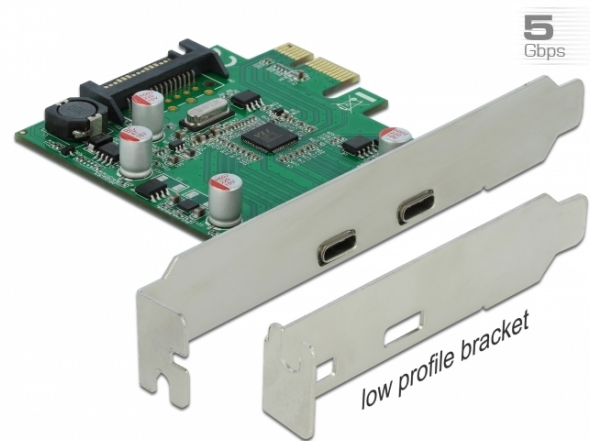

## Specification

- Connectors:
  - external:
    - 2 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female
  - internal:
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x1, V2.0
- Chipset: VIA VL805
- Data transfer rate up to:
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Power supply mandatory via SATA power connector
- Electrical power per port: max. 7 watt (5 V / 1.4 A)

## System requirements

- Linux Kernel 3.16 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express slot
- A free SATA power plug

## Package content

- PCI Express card
- Low profile bracket
- User manual

## Item no. 90493

EAN: 4043619904938

Country of origin: China

Package: • Retail Box



## Images



| General                     |  |
|-----------------------------|--|
| Form factor:                | Low Profile  |
| Supported operating system: | Linux Kernel 3.16 or above<br>Windows 8.1 32-bit<br>Windows 8.1 64-bit<br>Windows 10 32-bit<br>Windows 10 64-bit |
| Interface                   |  |
| External:                   | 2 x SuperSpeed USB (USB 3.2 Gen 1) USB Type-C™ female  |
| Internal:                   | 1 x PCI Express x1, V2.0<br>1 x SATA 15 pin power connector  |
| Technical characteristics   |  |
| Chipset:                    | VIA VL805  |
| Data transfer rate:         | 5 Gbps   |
| Physical characteristics    |  |
| Slot bracket:               | low profile<br>standard  |