

Features

- ▶ DVI via USB Alt-Mode for resolutions up to WUXGA / 1920x1200
- ▶ Gold plated precision contacts, unidirectional
- ▶ USB-C male to DVI-D Single Link (24+1) male
- ▶ High purity copper conductors and triple shielding
- ▶ 100% tested for professional AV applications

Connections

Connector Material	ABS Plastic
Contact Material	Gold-plated
Directionality	Unidirectional from USB-C Source to DVI Display, Active Signal Conversion
Connector 1	USB-C Male
Dimensions Connector 1	ca. 30 x 12.5 x 6.65 mm
Connector 2	DVI-D (24+1) Single Link Male
Dimensions Connector 2	ca. 59.6 x 41.6 x 16.5 mm

Cable



Type	Round Cable
Construction	4x Twisted Pairs 34AWG + 6x Single Conductor 34AWG + 2x Single Conductor 28AWG
Shielding	Triple Shielded
Inner Conductor Material	Tinned Stranded Copper
Jacket Outer Material	PVC
Cable Outer Diameter	3.9mm
Minimum Bend Radius	27.3mm
Dielectric Strength	AC 500V / 1 Minute
Sheath Printing	/

Signal Transmission

Standard	USB-C DP Alt-Mode DVI-D Single Link 24+1 (18+1 Pins Connected)
Bandwidth	4.95 Gbps
Max. Resolution	2K WUXGA 1920x1200

General

Transmission Distance	Up to 2.00m
Operation Temperature	0°C - 45°C
Colour	White / Black
Packaging	Giftbox, PAP21
Certification / Compliance	CE, FCC, ROHS, REACH, WEEE

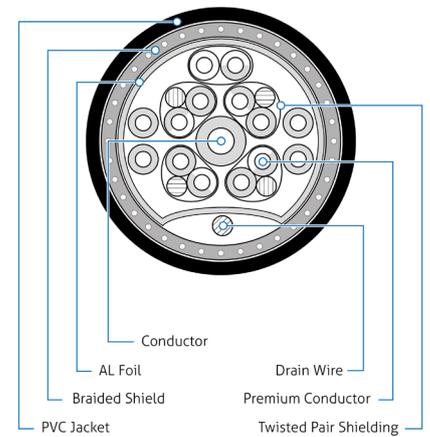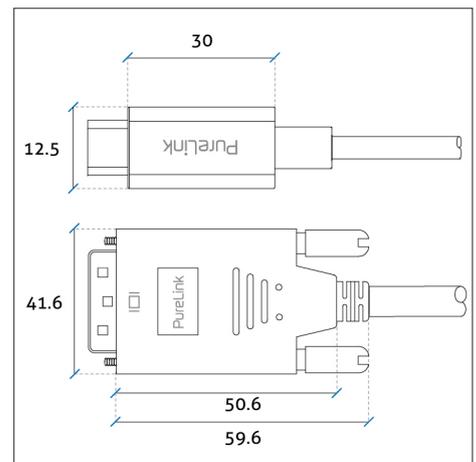

IS2210 / IS2211 Overview

Parent	Art. No.	Length	Colour	EAN
IS2210	IS2210-010	1.00m	white	4251364728987
	IS2210-015	1.50m	white	4251364728994
	IS2210-020	2.00m	white	4251364729007
IS2211	IS2211-010	1.00m	black	4251364729014
	IS2211-015	1.50m	black	4251364729021
	IS2211-020	2.00m	black	4251364729038

