



AC600 Nano Wireless USB Adapter

Plug it. Forget it!

Archer T600U Nano



200Mbps on 2.4GHz
433Mbps on 5GHz



256QAM
33% faster on 2.4GHz




USB 2.0

Highlights

AC600 Dual Band Wi-Fi

The Archer T600U Nano receives Wi-Fi signals on two separate bands. Supporting 256QAM technology increases 2.4GHz data rate from 150Mbps to 200Mbps for 33% faster performance. Choose the 2.4GHz band for surfing and social media, and 5GHz band for HD streaming and lag-free gaming.

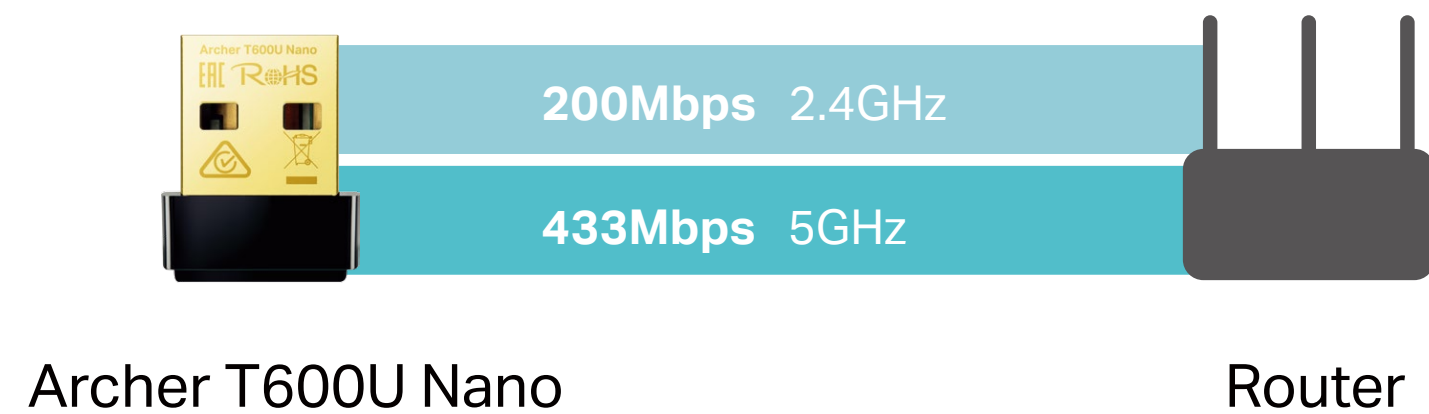

The Smallest and Faster Around

As the smallest AC adapter available, enjoy stable and fast Wi-Fi wherever you need it.



Features

Speed

- **Fast Wi-Fi** – 200Mbps on 2.4GHz and 433Mbps on 5GHz wireless speeds are ideal for HD streaming video, lag-free gaming and large file downloads
- **802.11ac Support** – Wi-Fi technology that is 3 times faster than 802.11n

Design

- **Mini design** – The Archer T600U Nano is very small and can be left in a computer's USB port once plugged in

Reliability

- **Dual Band** – Selectable 2.4GHz and 5GHz bands to avoid wireless signal interference
- **Backwards Compatibility** – Supports routers utilizing 802.11 a/b/g/n Wi-Fi standards

Security

- **Active Defense** – WPA/WPA2 encryption provides your Wi-Fi network with advanced protection against security threats

Ease of Use

- **Easy Installation** – A friendly user interface utility on a CD for simple installation

Specifications

Wireless

- Wireless Standard: IEEE 802.11b/g/n 2.4GHz, IEEE 802.11a/n/ac 5GHz
- Frequency: 2.4GHz, 5GHz
- Wireless Mode: Ad-Hoc / Infrastructure Mode
- Wireless Security: WEP, WPA/WPA2, WPA-PSK/ WPA2-PSK
- Modulation Technology: DBPSK, DQPSK, CCK, OFDM, 16-QAM, 64-QAM, 256-QAM

Hardware

- Interface: USB 2.0
- LED: Status
- Dimensions: 0.73 × 0.59 × 0.28 in (18.6 × 15 × 7.1 mm)

Others

- Package Contents
AC600 Nano Wireless USB Adapter Archer T600U Nano
Quick Installation Guide
Resource CD
- Certification
FCC, CE, RoHS
- System Requirements
Windows 10/8.1/8/7/XP, Mac OS X 10.9-10.14
- Environment
Operating Temperature: 0°C~40°C (32°F ~104°F)
Storage Temperature: -40°C~70°C (-40°F ~158°F)
Operating Humidity: 10%~90% non-condensing
Storage Humidity: 5%~90% non-condensing



Mac
Support



For more information, please visit

<https://www.tp-link.com/en/products/details/Archer-T600U-Nano.html>

or scan the QR code left

Specifications are subject to change without notice. TP-Link is a registered trademark of TP-Link Technologies Co., Ltd. Other brands and product names are trademarks or registered trademarks of their respective holders. Copyright ©2019 TP-Link Technologies Co., Ltd. All rights reserved.

*Maximum wireless signal rates are the physical rates derived from IEEE Standard 802.11 specifications. Actual wireless data throughput and wireless coverage are not guaranteed and will vary as a result of 1) environmental factors, including building materials, physical objects, and obstacles, 2) network conditions, including local interference, volume and density of traffic, product location, network complexity, and network overhead, and 3) AP limitations, including rated performance, location, connection quality, and AP condition.

*To ensure compatibility, you may need to update the adapter's drivers after an OS update. You can find our latest drivers in the download center at tp-link.com/en/download-center.

www.tp-link.com